

## **PRODUCT DETAILS**

PRODUCT CODE	LN1MF	
CHARACTERISTIC	Lead-Acid (Enhanced Flooded Battery)	
GROUP SIZE	N44H	
	Material : Polypropylene (PP)	ASUPER CHARGE  ATTER  HYBRID AUXILIARY  HYBRID AUXILIARY
	Handle : 1pc plastic	
	Ledge : EL & FL	
CASE AND LID	Venting System : Centralized system with degassing vents on sides	36 ####################################
		36 Months Warranty*

## **DIMENSIONAL SPECIFICATIONS**


OVERALL DIMENSIONS	METRIC (mm)
LENGTH	207
WIDTH	174
HEIGHT (bottom to top cover)	190
TOTAL HEIGHT (bottom to top of terminal)	190
APPROXIMATE WEIGHT, kg	12.5

TERMINAL DATA	POSITIVE	NEGATIVE
TYPE	SAE	SAE
TERMINAL HEIGHT (mm)	18.5±1.50	18.5±1.50
BOTTOM DIAMETER (mm)	19.5+0/-0.3	19.5+0/-0.3
TAPER	1:9	1:9
POLARITY C (Positive Right)		ve Right)

## **CAPACITY SPECIFICATIONS**

o, ,				
	450 CCA			
COLD CRANKING AMPS (CCA)	Test reference: AS60095:2022 Rated CCA DCH at 18°C for 30 sec			
AMPERE-HOUR AT	52 Ah			
20-HOUR CAPACITY	Test reference: AS60095:2022			
	Rated AH DCH at 10.5 V cut-off voltage			

	91 min
RESERVE CAPACITY TEST	Test reference: AS60095:2022 25Amps DCH at 10.5V cut-off voltage

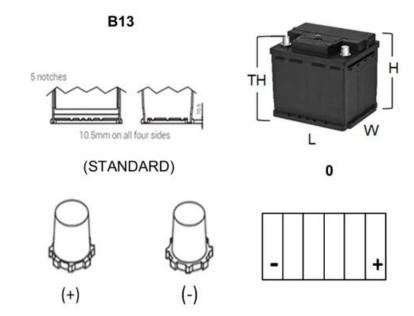

<sup>\*</sup>Warranty terms and conditions apply

Revision No. **00** Product Specification Sheet Release Date: Sept. 2024 **LN1MF** Page 1 of 1