


**PRODUCT DETAILS**

|                       |   |  |
|-----------------------|---|--|
| <b>PRODUCT CODE</b>   | EMFN150L  |  |
| <b>CHARACTERISTIC</b> | Sealed Maintenance Free (SMF) Lead Acid Battery |  |
| <b>GROUP SIZE</b>     | N150  |  |
| <b>CASE AND LID</b>   | Material : Polypropylene (PP)                   |  |
|                       | Handle : 2-pc rope handle                       |  |
|                       | Ledge : No ledge                                |  |
|                       | Vent : Centralised venting                      |  |
|                       |   | <b>24 Months Warranty*</b>   |

**DIMENSIONAL SPECIFICATIONS**


| OVERALL DIMENSIONS                              | METRIC (mm) |
|---|-------------|
| <b>LENGTH</b>                                   | 514         |
| <b>WIDTH</b>                                    | 223         |
| <b>HEIGHT</b> (bottom to top cover)             | 196         |
| <b>TOTAL HEIGHT</b> (bottom to top of terminal) | 217         |
| <b>APPROXIMATE WEIGHT, kg</b>                   | 40.9        |

| TERMINAL DATA               | POSITIVE          | NEGATIVE    |
|-----------------------------|-------------------|-------------|
| <b>TYPE</b>                 | SAE               | SAE         |
| <b>TERMINAL HEIGHT</b> (mm) | 18.5±1.50         | 18.5±1.50   |
| <b>BOTTOM DIAMETER</b> (mm) | 19.5+0/-0.3       | 19.5+0/-0.3 |
| <b>TAPER</b>                | 1:9               | 1:9         |
| <b>POLARITY</b>             | E (Positive Left) |             |

**CAPACITY SPECIFICATIONS**

|  |  |
|--|--|
| <b>COLD CRANKING AMPS (CCA)</b>        | 1030 CCA   |
|  | Test reference: AS60095:2022<br>Rated CCA DCH at 18°C for 30 sec       |
| <b>AMPERE-HOUR AT 20-HOUR CAPACITY</b> | 150 Ah   |
|  | Test reference: AS60095:2022<br>Rated AH DCH at 10.5 V cut-off voltage |

|                              |   |
|------------------------------|---|
| <b>RESERVE CAPACITY TEST</b> | 300 min   |
|                              | Test reference: AS60095:2022<br>25Amps DCH at 10.5V cut-off voltage |

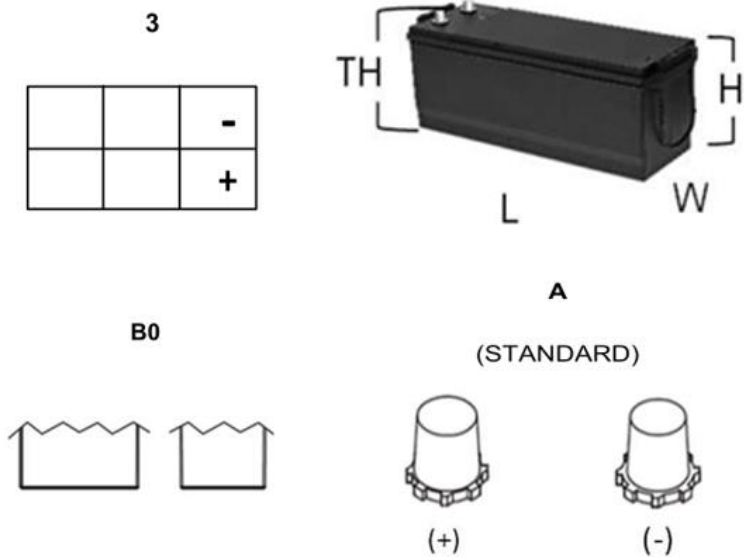

\*Warranty terms and conditions apply